




Works with Amazon Alexa, Google Home and Siri, Apple Watch, Wireless Smart Socket Remote Contro, Timer Switch, No Hub Required.

SKU:SHA5324-3 EAN:5060774552070



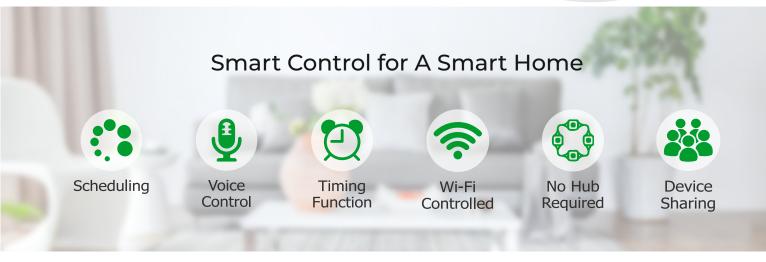

Features

- Compatibility Works with Amazon Alexa and Google Assistant for Voice Control.
- No Hub Required Works with any Wi-Fi router without the need for a separate hub. System Requirements: Android 5.0 or higher, iOS 10 or higher.
- Remote Access Control the Power to fans, lights, kettles, hair straighteners devices connected to the Smart Plug wherever you use the free ENERJSMART app on your phone.
- Allows control of plug-in lamps, chargers and TVs up to a total load of 13A.
- Scheduling and Away Mode Schedule the smart plug to automatically power electronics on and off; And turns your devices on and off at different times to give the appearance that someone is home.

Specifications

| Technical Parameters | |
|-------------------------|---------------|
| SKU | SHA5324-3 |
| Model No. | SY-PLSU03 |
| Amp rating | 13A |
| Colour | White |
| Frequency | 2.4G |
| Hub required | No |
| Indicator | LED indicator |
| Maximum electrical load | 2990W |
| Network technology | Wi-Fi |
| Pack quantity | 3 |
| Power voltage supply | 240V |
| Product Size | 58*58*61mm |
| Product Weight | 87g |